

FORK R2 DOLLY

R2MANUFACTURING.COM

PO BOX 14,
ALDENNY,
14004

240-230-7263

Outer Fork Dolly

Inner Fork Dolly



1
Install: 5/16" X 1/2" Long S.S. cap strew
into outer cross bar



2
Bolt outer/inner crossbar to fork dolly

Install the following:
2-2 1/4" S.S. screws
2-washers
2- 1/4-20 nylon lock nuts



3
Install inner crossbar into outer crossbar



4
Install 4 casters using:
16-1" 1/4-20 stainless steel screws
16-washers
16-1/4-20 nylon lock nuts




5
Screw 2-1/2-13 cap screw into top of fork
dollys



Install fork dolly onto forks



Fork dolly must go past the fork frame mount as pictured above

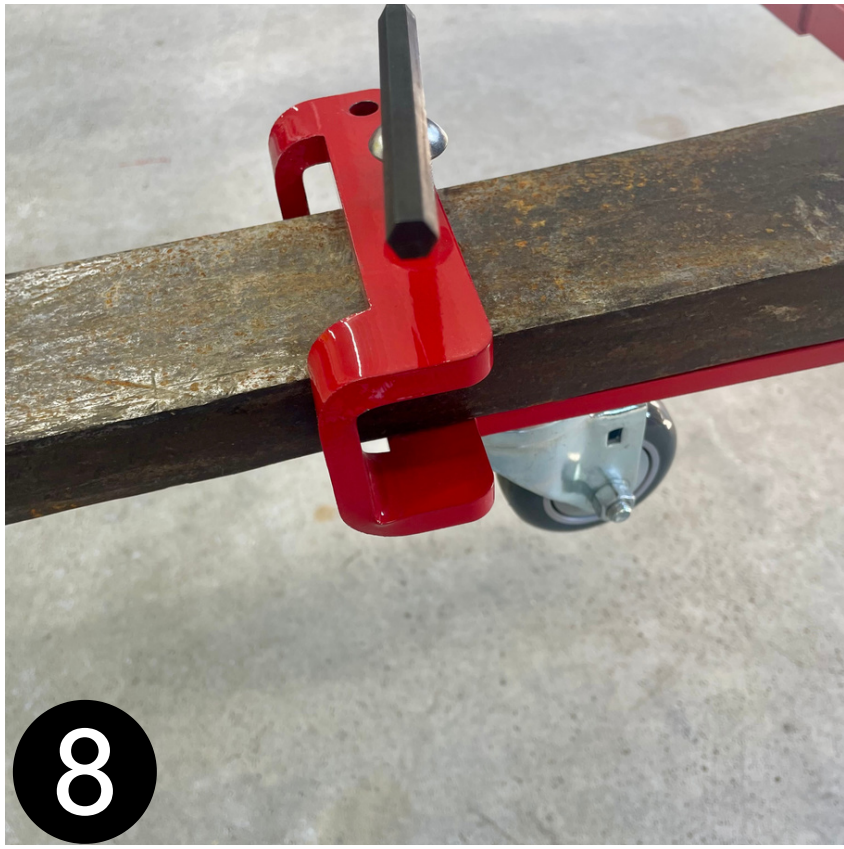

Lightly tighten fork dolly onto fork



Lightly tighten cap screw onto crossbar



Place allen wrenches into holes located on fork dolly



**FINAL
PRODUCT**